



# Krups 963 Bottom Panel Removal

Removing the bottom panel/cover of the machine.

Written By: Wyatt Hall



# INTRODUCTION

Prerequisite Only

---



## TOOLS:

- [Phillips #2 Screwdriver](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Removing Bottom Screws




- ⚠ Make sure the device is unplugged before continuing.
- Use a Phillips size 2 screwdriver to remove the four 12mm screws found on the bottom of the machine.

## Step 2



- Remove the single black Phillips size 0 10mm length screw on the back of the machine.

## Step 3

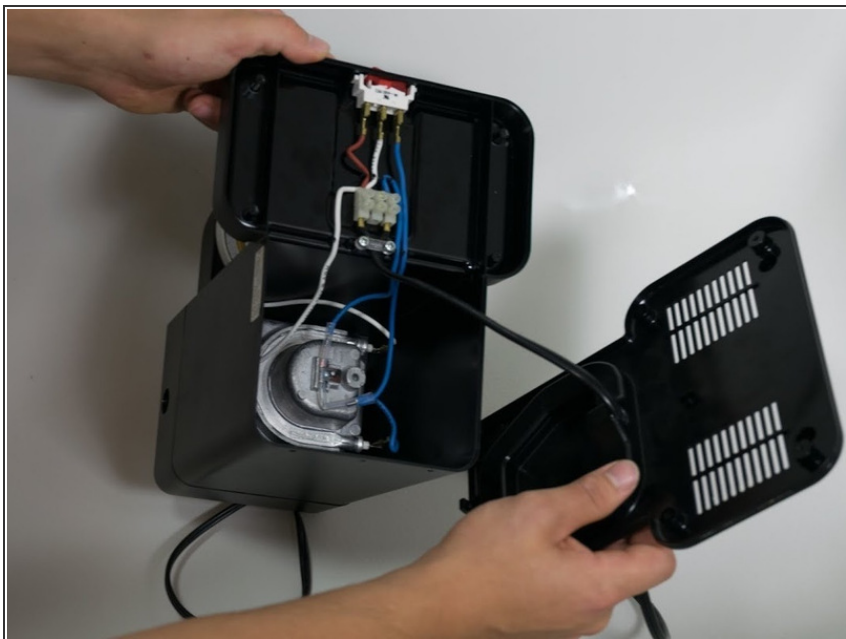

- Remove the bottom cover from the machine and slide it down the power cord.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-18 08:09:08 PM.